

## PRODUCT DATA SHEET

# SikaSet® Waterplug

(formerly MSeal 590)

ONE-COMPONENT, CEMENT-BASED, FAST-SETTING WATER-STOP REPAIR MORTAR

## DESCRIPTION

SikaSet® Waterplug is a one-component, quick-setting, Portland-cement-based hydraulic repair mortar that instantly stops running water through holes or cracks in concrete or masonry. It expands as it sets to lock in-place even under constant water pressure.

## USES

- Non-moving (static) cracks and holes with running water or moisture seepage
- For immersion service
- For anchoring vertical bolts
- Basements
- Foundations
- Retaining walls
- Sewers

### Locations

- Vertical, overhead, or horizontal
- Interior or exterior
- Above or below grade

### Substrates

- Concrete and masonry

## CHARACTERISTICS / ADVANTAGES

- Fast setting so it can stop running water and develop high strength quickly
- Fully hydraulic so it can be set above or below the water
- Shrinkage compensated so it expands to lock in place
- One component so it mixes easily with water only
- Ready to topcoat in 15 minutes with appropriate product to minimize downtime
- Durable non-metallic, non-gypsum formula to maintain volume stability over time
- Formulation is available for cold-weather applications for use in all seasons and climates
- Certified to the NSF/ANSI Standard 61 for potable water contact

## PRODUCT INFORMATION

<b>Chemical Base</b>	SikaSet® Waterplug is a proprietary mix composed of cement, graded silica, calcium hydroxide, fillers, and additives.
<b>Packaging</b>	2.5 lb (1.14 kg) cans 10 lb (4.5 kg) cans 50 lb (22.7 kg) pails
<b>Shelf Life</b>	1 year when properly stored
<b>Storage Conditions</b>	Transport and store in an unopened container in a cool, clean, dry area between 45° and 90 °F (7° and 32 °C). Keep the container tightly sealed after opening to maintain the shelf life freshness of the unused portion of the remaining powder.

**PRODUCT DATA SHEET**

SikaSet® Waterplug

September 2024, Version 02.01

020701010010000419

## TECHNICAL INFORMATION

<b>Compressive Strength</b>	20 min–120 min	1,800 psi (12.4 MPa)	(ASTM C 109)
	1 day	4,000 psi (27.6 MPa)	
	7 days	5,000 psi (34.5 MPa)	
	28 days	5,500 psi (37.9 MPa)	
<b>Tensile Strength in Flexure</b>	7 days	600 psi (4.1 MPa)	(ASTM C 348)
	28 days	1,500 psi (10.3 MPa)	
<b>Tensile Strength</b>	7 days	300 psi (2.1 MPa)	(ASTM C 190)
	28 days	350 psi (2.4 MPa)	

Test results are averages obtained under laboratory conditions at 70 °F (21 °C) and 50% rh. Reasonable variations can be expected.

## APPLICATION INFORMATION

<b>Yield</b>	Volume: 15.6 in <sup>3</sup> /1 lb (254 cm <sup>3</sup> /0.45 kg) Static cracks: ¾" by ¾" by 28"/1 lb (1.9 cm by 1.9 cm by 70 cm/0.45 kg).
--------------	---

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## ECOLOGY HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

## APPLICATION INSTRUCTIONS

### NOTES ON INSTALLATION

- Do not apply to frozen or frost-covered surfaces.
- Do not apply to dynamic (moving) cracks.
- Do not use to fill expansion joints or control joints.
- Do not remix (retemper) hardened material.
- Always Pre-Dampen the substrate prior to placing SikaSet® Waterplug.
- Do not use it as a surface-applied coating or as a paring material.
- Do not fill voids greater than 30 in<sup>3</sup> (490 cm<sup>3</sup>) in a single lift.
- Do not use if hard lumps have developed in the powder.
- Make certain the most current versions of the product data sheet and SDS are being used.
- Proper application is the responsibility of the user. Field visits by Sika personnel are for the purpose of making technical recommendations only and not for supervising or providing quality control on the job-site.

### MIXING

- Mix SikaSet® Waterplug powder with clean, potable water.

- Use powder (neat) without adding any aggregates, chemical additives, or admixtures.
- Add just enough water to mix rapidly by hand to a stiff, low-slump, putty consistency. Mix no longer than 30 seconds.
- Mix only enough SikaSet® Waterplug that can be successfully placed within 3 minutes under normal conditions (see Temperature). Do not retemper material after initially mixing.
- Clean the mixing vessel and tools immediately after each use.

### Temperature

Cold or hot air, surface, and material temperatures will retard or quicken SikaSet® Waterplug setting time. Special attention must be given when mixing and applying. The SikaSet® Waterplug and mixing water should feel neutral to the touch, normally 70 °F (21 °C). On average SikaSet® Waterplug will set in approximately 3–5 minutes.

### Hot weather use

- From 86° to 100 °F (30° to 37 °C), SikaSet® Waterplug will set very quickly. The material temperature should not be above 80 °F (26 °C) and mixing water over 100 °F (37 °C); otherwise set begins immediately and structural strength lessens when applying during these extreme conditions.
- SikaSet® Waterplug should always be placed within 30–60 seconds after mixing.
- If appropriate, use ice water when mixing to slow down the setting action.

### Cold weather use


- SikaSet® Waterplug should be stored or brought up to normal room temperatures, 40 to 70 °F (4 to 21 °C), before mixing and use. Do not apply SikaSet® Waterplug if the ambient air or surface temperatures are 40 °F (4 °C) or less or are expected to fall below 40 °F (4 °C) within 12 hours after initial placement.

## APPLICATION

- Pre-dampen the substrate prior to installing SikaSet® Waterplug.
- Place SikaSet® Waterplug with minimum working, kneading, or rubbing.
- Force SikaSet® Waterplug repair mortar into cracks or holes and hold it in place (without twisting) until the set is fully achieved.
- Just prior to the final hard set, SikaSet® Waterplug may be “shaved” with a trowel until flush with the surrounding surface. Always shave from the center out, in the direction of the bond line.
- If the repair area is dry at the time of placement, keep the substrate damp for 15 minutes minimum, using a fine spray misting of water, before and after placement.

### Sealing Junctions

- To seal static cracks at the junction of floors and walls, route or cut out the crack at least ¾" (19 mm) wide and deep, slightly undercutting if possible.
- Flush away all loose debris, dust, and dirt with clean water.
- Force SikaSet® Waterplug into the prepared crack with a round tool or margin trowel until a set is fully achieved and smooths out to form a cove at wall-to-floor junctions.
- Keep damp for at least 15 minutes.

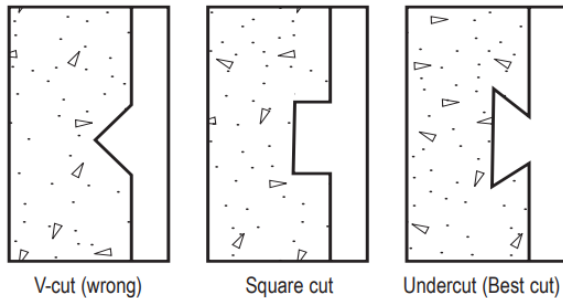

### Stopping Running Water

- To stop active water from running through concrete and masonry, cut out, crack, or hole to a minimum depth and width of ¾" (19 mm). Always square cut or undercut when possible; do not “V” cut.
- Start at the top and force SikaSet® Waterplug into crack. In areas of great pressure, do not place SikaSet® Waterplug into opening immediately. Hold SikaSet® Waterplug in hand or on a trowel until a slight warming occurs. Then press SikaSet® Waterplug firmly into the opening.
- Do not remove the trowel or hand pressure too soon so as to provide some confinement to SikaSet® Waterplug expansion during its set. Do not twist SikaSet® Waterplug during placement or disturb during set time (5 minutes).
- After placement to stop the active water flow, care-

fully cut and “trowel shave” the patch level with the surrounding surface.

### Sealing Leaks in Joints and Cracks

- To stop leaking mortar joints or static cracks in below-grade masonry and concrete walls, cut out defective mortar joints or cracks to a minimum width and depth of ¾" (19 mm). Undercut when possible.
- Force SikaSet® Waterplug into the opening and keep damp for at least 15 minutes or until a set is fully achieved.

### Repairing Constructions Faults

- For patching holes and voids, etc., in concrete walls, remove all tie wires and wood or steel separators by cutting back from the surface to a minimum depth of ¾" (19 mm).
- When there is no active water present, repair mortars may be used more appropriately.

## APPLICATION METHOD / TOOLS

### Anchoring Hardware

- To anchor steel bolts or posts vertically in concrete or masonry, drill a hole deep enough to properly secure the bolt or post and large enough so there is at least ½" (13 mm) on all sides of the bolt or post.
- Fill the hole with SikaSet® Waterplug and tamp so that the entire hole is full. Immediately center bolt or post over the hole and force into the putty-like SikaSet® Waterplug.
- Tamp SikaSet® Waterplug firmly around the bolt or post; keep continuously moist for 15 minutes.
- Apply no pressure or stress to the bolt or post for a minimum of 5 hours after placement.

### Top coating

1. Cured SikaSet® Waterplug repairs can be top coated with Sika Thoroseal®-581 or SikaTop®-584 Seal (see Form Nos. 1019906 and 1019908), both modified with Sika Thoroseal® Acryl 60 (see Form No. 1019073), as soon as an initial set is reached.
2. Cured SikaSet® Waterplug repairs can also be top-coated with various alkali-resistant acrylic coatings or used in conjunction with Sika Thorocoat®-400, Sikagard® HB 200, and Sika Thorocoat®-250 (see Form Nos. 1019100, 1019101, and 1019910).
3. SikaSet® Waterplug may also be used with pre-formed waterproof sheet membranes after an approximately 6–7 day cure.

### CLEANING OF TOOLS

Clean tools and equipment immediately with water.

#### PRODUCT DATA SHEET

SikaSet® Waterplug

September 2024, Version 02.01

020701010010000419

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request. It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of Sika® Corporate Legal in Baar.

### **Sika Pakistan (Pvt.) Limited**

141-CCA Phase IV, DHA  
Lahore Punjab 54792  
Pakistan  
phone: +92 42 3569 4266 - 67  
fax: +92 42 3569 4268  
<http://pak.sika.com/>

### **PRODUCT DATA SHEET**

SikaSet® Waterplug  
September 2024, Version 02.01  
020701010010000419

